



FIXORA
Engineered for Reliability

Cabinet & Furniture Hardware

CATALOG

Engineered for Reliability

Professional Hardware
For Residential & Architectural Projects

CONTENTS

01

Drawer Slide06

02

Cabinet Hinge11

03

Cabinet Handle14

04

Wire Product21

05

Sliding Door Fitting24

06

Sofa Leg29

07

Furniture Fitting31

08

Furniture Connector36



BRAND STORY

FIXORA is an architectural hardware brand focused on delivering stable, professional-grade hardware solutions for the industry.

Built specifically for distributors, contractors, and project-based procurement, we provide dependable products supported by efficient manufacturing and reliable supply systems.

Through consistent quality, scalable production capacity, and local logistics, FIXORA helps partners build long-term business growth with confidence.



Trade-focused
Brand



Supply Partner



Stable
Distribution



North America
Network



CORE POSITIONING



Trade-focused Brand

Built exclusively for professional distribution channels.



Supply Partner

Reliable hardware solutions for residential and architectural projects.



Stable Distribution Support

Consistent quality and predictable supply for growing markets.



Local Network

Efficient inventory and replenishment for faster delivery.

PRODUCT COLLECTION

Complete architectural hardware solutions for residential and architectural projects.

- **DRAWER SLIDE**



- **CABINET HINGE**



- **CABINET HANDLE**



- **WIRE PRODUCT**



- **SLIDING DOOR FITTING**



- **SOFA LEG**



- **FURNITURE CONNECTOR**



- **FURNITURE FITTING**





DRAWER SLIDE

Reliable Solutions

For Residential & Architectural Projects

DS4512B

Standard Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.0x1.0x1.2mm
Length	250-600mm(10"-24")
Thickness	12.7±0.2mm
Maximum load	66 lbs (30kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DS4514B

Standard Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.1x1.2x1.4mm
Length	250-600mm(10"-24")
Thickness	12.7±0.2mm
Maximum load	100 lbs (45kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DS4512A

Soft-Close Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.0x1.0x1.2mm
Length	300-600mm(12"-24")
Thickness	12.7±0.2mm
Maximum load	66 lbs (30kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DS4514A

Soft-Close Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.1x1.2x1.4mm
Length	300-600mm(12"-24")
Thickness	12.7±0.2mm
Maximum load	100 lbs (45kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DS4512C

Push-to-Open Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.0x1.0x1.2mm
Length	300-600mm(12"-24")
Thickness	12.7±0.2mm
Maximum load	66 lbs (30kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DS4514C

Push-to-Open Ball-Bearing Slide, Full Extension



Width	45mm
Material	cold - rolled steel 1.1x1.2x1.4mm
Length	300-600mm(12"-24")
Thickness	12.7±0.2mm
Maximum load	100 lbs (45kg)
The installed forms	drawer side
Surface treatment	Galvanized or Electrophoresis black

DSE381A

Concealed Undermount Slide, Full Extension



Applicable drawer side panel thickness	10mm-16mm
Maximum load	35kg
Installation form	Bottom of the drawer
Material	Galvanized steel
Length	300-550mm(12"-22")
Material thickness (upper/middle/lower rail)	1.2x1.5x1.8mm

DSA382A

Concealed Undermount Slide, Full Extension



Applicable drawer side panel thickness	10mm-16mm
Maximum load	35kg
Installation form	Bottom of the drawer
Material	Galvanized steel
Length	18" 21"
Material thickness (upper/middle/lower rail)	1.0x1.4x1.8mm



CABINET HINGE

Reliable Solutions

For Residential & Architectural Projects

CH9021B

Concealed Hinge



TECHNICAL SPECIFICATION

- Standard economical hinge **without soft closing**
- Clip on **without cam adjust**
- 105° opening angle for Door thickness of **14-22mm**
- Metal material, Cu-Nickel
- Integrated silent system
- Easy clip on and tool-free door to cabinet assembly and removal
- 3-dimensional adjustment with relevant cam plate

CH9021A

Soft-Close Concealed Hinge



TECHNICAL SPECIFICATION

- Standard economical **soft close** hinge
- Clip on **without cam adjust**
- 105° opening angle for Door thickness of **14-22mm**
- Metal material, Cu-Nickel
- Integrated silent system
- Easy clip on and tool-free door to cabinet assembly and removal
- 3-dimensional adjustment with relevant cam plate

CH9031A

Soft-Close Concealed Hinge



TECHNICAL SPECIFICATION

- Standard **soft close** hinge
- Clip on **with cam adjust**
- 105° opening angle for Door thickness of **14-26mm**
- Metal material, Cu-Nickel /Cu-black nickel plated
- Integrated silent system
- Easy clip on and tool-free door to cabinet assembly and removal 3-dimensional adjustment (with cam plate)
- **Push open function for option**

CH701A

Soft-Close American Hinge



TECHNICAL SPECIFICATION

- Compact **soft close** hinge for face frame cabinets
- 105° opening angle for Door thickness of **14-26mm**
- For face frame cabinet frame thickness 3/4" (19mm)
- Metal material, Cu-nickel plated
- Multi-type of overlay to application on different cabinets
- Integrated silent system(With deactivation option)
- 3-dimensional front adjustment
- Overlay Options: 1/2", 3/4"

CH702A

Soft-Close American Hinge



TECHNICAL SPECIFICATION

- Compact **soft close** hinge for face frame cabinets
- 105° opening angle for Door thickness of **14-22mm**
- For face frame cabinet frame thickness 3/4" (19mm)
- Metal material, Cu-nickel plated
- Multi-type of overlay to application on different cabinets
- Integrated silent system(With deactivation option)
- 3-dimensional front adjustment
- Overlay Options: 1-1/2", 1-1/4", 1-5/16", 1"



CABINET HANDLE

Reliable Solutions

For Residential & Architectural Projects

PSQB206Z

Zinc Alloy Cabinet Knob



High : 32mm

Diameter : 25mm

Finish Options : CB/GD/NB

PS3910

Zinc Alloy Cabinet Knob



High : 28.5mm

Diameter : 29.5mm

Finish Options : BK/SF/SN/CB/NB/GD/PC/BB/CP

PS81136

Zinc Alloy Cabinet Knob



High : 33.5mm

Diameter : 29.5mm

Finish Options : CB/ORB/BK/SN/NB

PSR03

Zinc Alloy Cabinet Knob



High : 29mm

Diameter : 22mm

Finish Options : BK/SN/GD/NB/CB

PSR82982

Zinc Alloy Cabinet Knob



High : 29.5mm

Diameter : 26.5mm

Finish Options : NB/GD/BK/CB

PS92002

Zinc Alloy Cabinet Knob



High : 22.5mm

Total length : 38.5mm

Width : 15.3mm

Finish Options : BK/GD/SN/PC/CB/NB

PD92002

Zinc Alloy Cabinet Pull



High : 28.5mm

Total length : 102/122/154/186/218mm

Width : 13mm

Hole distance: 76/96/128/160/192mm

Finish Options : BK/GD/SN/PC/CB/NB

PD840

Zinc Alloy Cabinet Pull



High : 21.5mm

Total length: 121/139mm

Width : 11.5mm

Hole distance(mm) : 76/96mm

Finish Options : SN/ORB/BK/BB

PDJS09

Zinc Alloy Cabinet Pull



High : 28mm

Total length : 104/136/168/200mm


Width : 9mm

Hole distance : 96/128/160/192mm

Finish Options : CB/PC/NB/SN/BK

PDN03

Zinc Alloy Cabinet Pull



High : 31mm

Total length : 98/118/150mm

Width : 22mm

Hole distance(mm) : 76/96/128mm

Finish Options : BK/SN

PD82982

Zinc Alloy Cabinet Pull



High : 34.5mm

Total length : 92mm

Width : 23.5mm

Hole distance(mm) : 76mm

Finish Options : NB/GD/BK/CB

PDC15

Zinc Alloy Cabinet Pull



High : 28mm

Total length : 111/131/137/163mm

Width : 12.5mm

Hole distance(mm) : 76/96/102/128mm

Finish Options : SN/ORB/GD/BK

PDN1702

Zinc Alloy Cabinet Pull



High : 28mm

Total length: 85.5/137.5/201.5mm

Width : 9.5mm

Hole distance : 76/128/192mm

Finish Options : NB/BK/CB

PDN1202

Zinc Alloy Cabinet Pull



High : 32mm

Total length: 143mm

Width : 12mm

Hole distance : 128mm

Finish Options : SN/GD/BK/CB

PST06

Aluminum Cabinet Knob



High : 32mm

Diameter : 34mm

Width : 13mm

Finish Options : BK+GD

PDT06

Aluminum Cabinet Pull



High : 33mm

Total length : 100.5/152.5mm

Width : 12mm

Hole distance : 76/128mm

Finish Options : BK+GD

PDT02

Aluminum Cabinet Pull



High : 36mm

Total length : 99/151mm

Width : 9.5mm

Hole distance : 76/128mm

Finish Options : GD/BK/CB

PD206A

Aluminum Cabinet Pull



High : 35mm

Total length : 122/175mm

Width : 14mm

Hole distance : 76/128mm

Finish Options : GD/BK/CB

PS301/PD301

Acrylic Cabinet Knob & Pull



PS301

High : 38mm

Total length : 40mm

Width : 14mm

Finish Options : SN/BK

PD301

High : 38mm

Total length: 110/122/129/135/161mm

Width : 14mm

Hole distance : 76/90/96/102/128mm

Finish Options : SN/BK

PS3S05/PD3S05

Acrylic Cabinet Knob & Pull



PS301

High : 39mm

Total length : 40mm

Width : 12mm

Finish Options : SN

PD301

High : 39mm

Total length : 110/122/129/135/161mm

Width : 12mm

Hole distance : 76/90/96/102/128mm

Finish Options : SN

PS201H/PD201H

Stainless Steel Cabinet Knob & Pull



PS201H

High : 32mm

Total length : 50mm

Width : 12mm

Finish Options : BK/SS/PC/GD/CB/WH

PD201H

High : 32mm

Total length : 100/150/192/224/256/288mm

Width : 12mm

Hole distance : 64/96/128/160/192/224mm

Finish Options : BK/SS/PC/GD/CB/WH

PS205H/PD205H

Stainless Steel Cabinet Knob & Pull



PS201H

High : 33.5mm

Total length : 50mm

Width : 12mm

Finish Options : BK/SS/BB/GC/BBBK/GCBK

PD201H

High : 33.5mm

Total length : 100/150/192/224/256/288mm

Width : 12mm

Hole distance : 64/96/128/160/192/224/256mm

Finish Options : BK/SS/BB/GC/BBBK/GCBK

PSDJ27/PDDJ27

Stainless Steel Cabinet Knob & Pull



PS301

High : 35mm

Total length : 50mm

Width : 12mm

Finish Options : SS/BK/GD/NB/CB

PD301

High : 35mm

Total length : 108/140/172/204/236/268/300/332mm

Width : 12mm

Hole distance : 96/128/160/192/224/256/288/320mm

Finish Options : SS/BK/GD/NB/CB

PSDJ16/PDDJ16

Stainless Steel Cabinet Knob & Pull



PS301

High : 35mm

Total length : 50mm

Width : 12mm

Finish Options : BK/SS

PD301

High : 35mm

Total length : 100/150/192/224/256mm

Width : 12mm

Hole distance : 64/96/128/160/192mm

Finish Options : BK/BB



WIRE PRODUCT

Reliable Locking Solutions

For Residential & Architectural Projects

WPA01

Single-Tier Basket



Description	Runner	Material	Finish	Product Size D*W*H	Cabinet size
single layer pull out basket	16" length, 45mm full extension ball bearing runner	iron wire	Chrome	D18**W11**H3.5"	W15**D21"
				D18**W14**H3.5"	W18**D21"
				D18**W17**H3.5"	W21**D21"
				D18**W20**H3.5"	W24**D21"
	18" length, 45mm full extension ball bearing runner			D21**W11**H3.5"	W15**D24"
				D21**W14**H3.5"	W18**D24"
				D21**W17**H3.5"	W21**D24"
				D21**W20**H3.5"	W24**D24"

WPA02

Two-Tier Basket



Description	Runner	Material	Finish	Product Size (mm) D*W*H	Cabinet size
double layers pull out basket (2 baskets can be pulled out)	16" length, 45mm full extension ball bearing runner	iron wire	Chrome	D18**W11**H13.8/15.5"	W15**D21"
				D18**W14**H13.8/15.5"	W18**D21"
				D18**W17**H13.8/15.5"	W21**D21"
				D18**W20**H13.8/15.5"	W24**D21"
	18" length, 45mm full extension ball bearing runner			D21**W11**H13.8/15.5"	W15**D24"
				D21**W14**H13.8/15.5"	W18**D24"
				D21**W17**H13.8/15.5"	W21**D24"
				D21**W20**H13.8/15.5"	W24**D24"

WPB03

Corner Unit



Description : 270° Revolving basket

Material : Iron wire

Finish : Chrome

Product Size (mm) Φ D*H : Φ 610x(560-790) / Φ 710x(560-790) / Φ 810x(560-790)

Cabinet size (T) : 700/800/900

WPA04

Multi-Tier Basket Unit



Description : Magic corner(L) / Magic corner(R)

Material : Iron wire

Finish : Chrome

Product Size (mm) W*D*H : 760x500x530

Cabinet size (T) : 800-900

WPC05

Trash Bin



Description : Single Locked type Trash Bin

Material : Iron wire

Finish : Chrome

Capacity : 28L/35L

Product Size (mm) W*D*H : 260x430x550

Cabinet size (T) : 350




SLIDING DOOR FITTING

Reliable Solutions

For Residential & Architectural Projects

BDJ0120

Barn Door Hardware

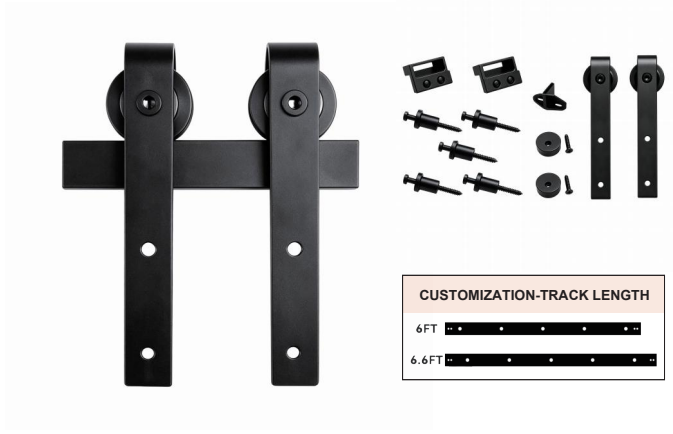

Specification	Wall Mounting Design
Max.Load Capacity	120kg
Door thickness	Adjustable from 1-3/8" to 1-3/4" (35mm~45mm)
Material	Steel
Installation method	one door
Color	Black

BDT0220

Barn Door Hardware



Specification	Wall Mounting Design
Max.Load Capacity	120kg
Door thickness	Adjustable from 1-3/8" to 1-3/4" (35mm~45mm)
Material	Steel
Installation method	one door
Color	Black

BDA0320

Barn Door Hardware



Specification	Wall Mounting Design
Max.Load Capacity	120kg
Door thickness	Adjustable from 1-3/8" to 1-3/4" (35mm~45mm)
Material	Steel
Installation method	one door
Color	Black

SLT1807

Light-Duty Sliding Door Fitting


SLT1807



SLT1807-1




Model No.:	SLT1807	SLT1807-1
Application	Wood door / Storage cabinet	Wood door / Storage cabinet
Load-bearing system	Top-hung track	Top-hung track
Max.Load Capacity	45kg	30kg
Roller type	Double roller	Single roller
Door thickness	16-21 or 21-28mm	16-21 or 21-28mm
Soft-close	No	No
Rail length	1m to 3m	1m to 3m

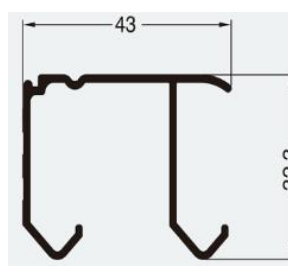

 Upper wheel assembly1 *2	 Upper wheel assembly2 *2	 Stopper *1
 Bottom guide *1	 Screw ST4.2*16(optional) *18	 Aluminum profile(optional) *1

FD07



Light-Duty Folding Door Fitting

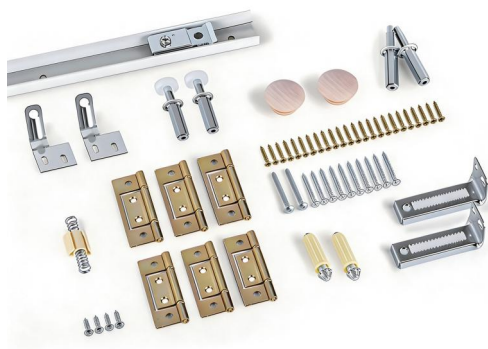

Model No.:	FD07
Application	Folding door / Kitchen cabinet / Wardrobe
Load-bearing system	Top-hung track
Max.Load Capacity	15kg
Roller type	None
Door thickness	22-28mm
Soft-close	No
Rail length	1.2m

SLB1808



Bottom-Rolling Sliding Door Fitting

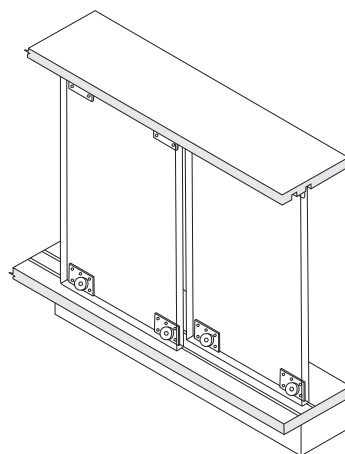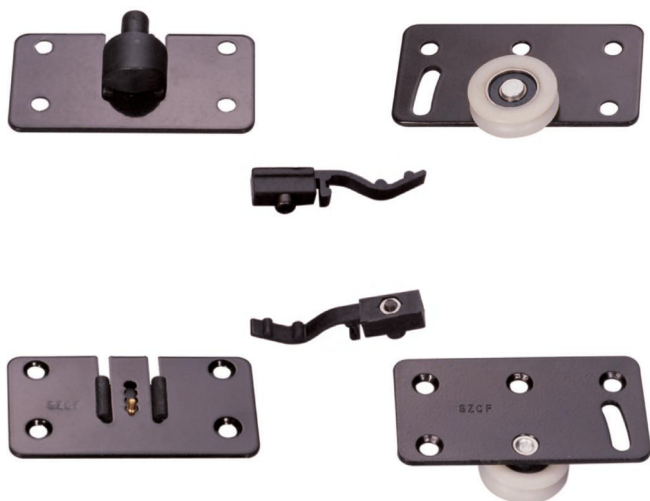

Model No. :	SLB1808
Application	Wardrobe / Storage cabinet
Load-bearing system	Bottom track
Max.Load Capacity	30kg
Roller type	Single roller
Door thickness	N/A
Soft-close	No
Rail length	2m to 3m

SLB1809

Soft-Close Bottom-Rolling Sliding Door Fitting

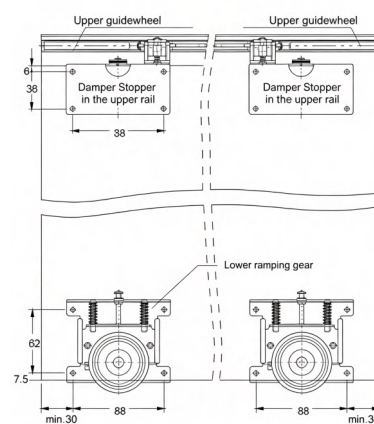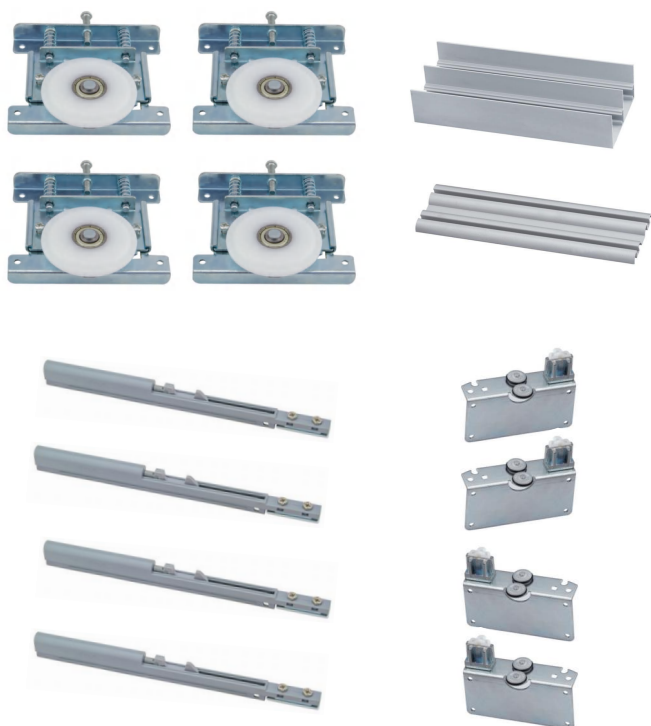

Model No. :	SLB1809
Application	Wardrobe / Storage cabinet
Load-bearing system	Bottom track
Max.Load Capacity	40kg
Roller type	Single roller
Door thickness	≤22mm
Soft-close	Yes
Rail length	2m to 3m

SLT1810


Heavy-Duty Sliding Door Fitting



Model No.:	SLT1810
Application	Concealed sliding door / Partition door
Load-bearing system	Top-hung track
Max.Load Capacity	50kg
Roller type	Double roller
Door thickness	30-40mm
Soft-close	No
Rail length	2m to 3m

SLT40+SD14

Heavy-Duty Soft-Close Sliding Door Fitting

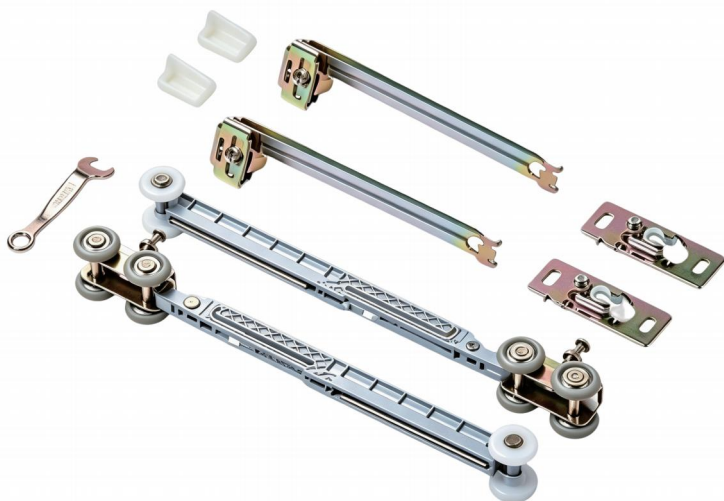

Model No.:	SLT40+SD14
Application	Concealed sliding door / Partition door
Load-bearing system	Top-hung track
Max.Load Capacity	75kg
Roller type	Double roller
Door thickness	30-50mm
Soft-close	Yes
Rail length	2m to 3m



SOFA LEG

Reliable Solutions

For Residential & Architectural Projects

SF120

Sofa Leg - Aluminum Alloy



High : 140mm
Length : 170mm
Width : 60mm
Finish : BK/GD

SF389

Sofa Leg - Iron



High : 45mm
Length : 220mm
Width : 75mm
Finish : BK/PC

SF124

Sofa Leg - Aluminum Alloy



High : 150mm
Length : 180mm
Width : 180mm
Finish : Nature

SF443

Sofa Leg - Iron



High : 100/120/150mm
Diameter : 40mm
Finish : PC

SF488

Sofa Leg - Iron



High : 130/150/170mm
Width : 100mm
Finish : PC/GD/BK

SF701

Sofa Leg - Iron



High : 120/150mm
Width : 115mm
Finish : PC

SF838

Sofa Leg - Iron



High : 105/135/150mm
Width : 130mm
Finish : PC/BK

SF916

Sofa Leg - Iron



High : 140mm
Width : 100mm
Diameter : 20mm
Finish : GD/BK



FURNITURE FITTING

Reliable Solutions

For Residential & Architectural Projects

FFC02

Upward Door Support Mini Version



Material : Iron+Plastic

Finish: Nickel Plated / Black

Available for: Upward-opening wooden doors and aluminum-frame doors

Features:

- Free stop at any position in opening angle about 30°
- Door can be closed when used with soft-closing hinges
- Opening force can be adjusted by turning the adjustment screw

Cabinet height KH: 240-500mm						
Front width: 500-1500mm						
Cabinet depth should be 200mm at least						
If using with 2 pcs, LF should be double.						
LF=Cabinet Height KH(mm) x (Cabinet Pull weight x 2 + Front weight) FW (kg)						
The open angle of the door will be limited by the angle of used hinges						
KH: Cabinet Height FW: Front Weight						
If the LF is mixed in 2 areas, we advise to choose the large type.						
Selection according to the LF		Selection according to the Weight		Product Qty	Opening Angle	Finish
KH- Cabinet Height	LF	Cabinet Height- KH(mm)	Front Weight- FW(KG)			
240-400mm	520-920	KH 240	2.2-3.6kg	1pc	100	Nickel
		KH 300	1.8-2.8kg			
		KH 400	1.3-2.1kg			
240-400mm	1040-1840	KH 240	4.4-7.2kg	2pcs	100	Nickel
		KH 300	3.5-5.6kg			
		KH 400	2.6-4.2kg			
300-400mm	1200-1750	KH 300	4.0-5.6kg	1pc	100	Nickel
		KH 400	3.0-4.1kg			
300-400mm	2400-3500	KH 300	8.0-11.2kg	2pcs	100	Nickel
		KH 400	6.0-8.2kg			
400-500mm	1500-2240	KH 400	3.8-5.6kg	1pc	100	Nickel
		KH 500	3.0-4.3kg			
400-500mm	3000-4480	KH 400	6.0-8.6kg	2pcs	100	Nickel
		KH 500	7.5-11.2kg			
240-400mm	520-920	KH 240	2.2-3.6kg	1pc	100	BK
		KH 300	1.8-2.8kg			
		KH 400	1.3-2.1kg			
240-400mm	1040-1840	KH 240	4.4-7.2kg	2pcs	100	BK
		KH 300	3.5-5.6kg			
		KH 400	2.6-4.2kg			
300-400mm	1200-1750	KH 300	4.0-5.6kg	1pc	100	BK
		KH 400	3.0-4.1kg			
300-400mm	2400-3500	KH 300	8.0-11.2kg	2pcs	100	BK
		KH 400	6.0-8.2kg			
400-500mm	1500-2240	KH 400	3.8-5.6kg	1pc	100	BK
		KH 500	3.0-4.3kg			
400-500mm	3000-4480	KH 400	6.0-8.6kg	2pcs	100	BK
		KH 500	7.5-11.2kg			

FFC03

Upward Door Support Standard Version



Material : Iron + Aluminum + Plastic

Finish: Oxidation

Capacity: Light type: 3-4.5 kg/pc .Heavy type: 5-6.5kg/pc

Cabinet Height: 300-500mm

Cabinet Width: ≤1200mm

Cabinet Depth: >260mm


Thickness: 16/18/22/26/28mm

Available for: Upward-opening wooden doors and aluminum-frame doors

Features:

- Built-in damper; free-stop function when the opening angle is greater than 30°, and soft-closing function when the opening angle is 30° or less.
- Easy to open
- Force is adjustable
- Easy assembly and adjustment
- Compact structure, higher space utilization

Installation Indication

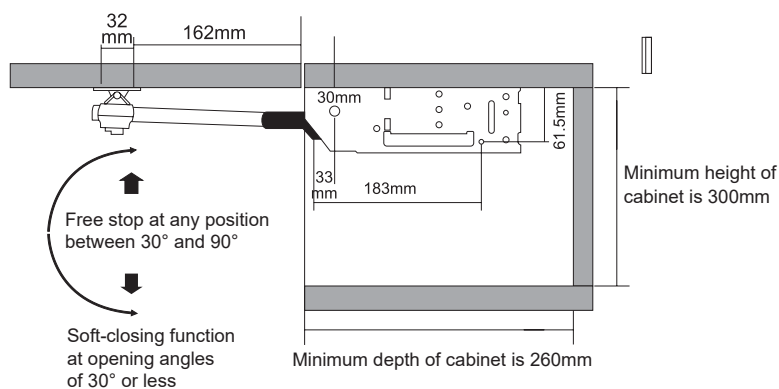

Types	Cabinet size		Panel Weight	Usage advice
	Height	Width		
Light type	350-450mm	400-900mm	3.1-4.5kg	1pc
	350-500mm	700-1200mm	5.5-8.5kg	2pcs
Heavy type	400-500mm	500-1200mm	5-6kg	1pc
	400-550mm	700-1500mm	9-11kg	2pcs

FFC01

Normal Gas Spring Mini Version



pressure	Tube diameter(mm)	Rod diameter(mm)	length(mm)	hole distance(mm)	stroke(mm)
60N	Φ15	Φ6	270	248	91
80N	Φ15	Φ6	270	248	91
100N	Φ15	Φ6	270	248	91
120N	Φ15	Φ6	270	248	91
150N	Φ15	Φ6	270	248	91

FFD01

Wardrobe Support



High : 80.5mm
Width : 44.3mm
Finish : Chrome
Material : Zinc alloy

FFD02

Wardrobe Support



High : 46mm
Width : 18.4mm
Finish : Chrome
Material : Zinc alloy

FFA01


Adjustable Feet



Length : 74mm
Width : 59mm
Diameter : 48mm
Color : Black
Material : ABS



FFB01

Cabinet Hanger

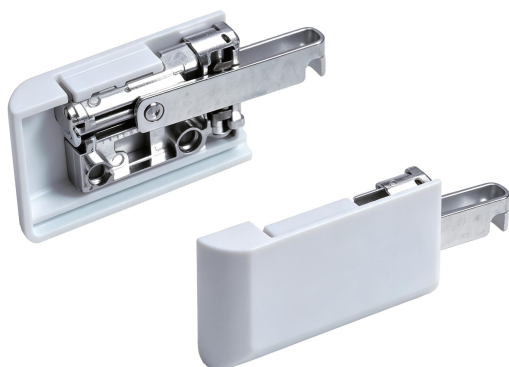


Color : White+Zinc plated

Material : Steel / Plastic

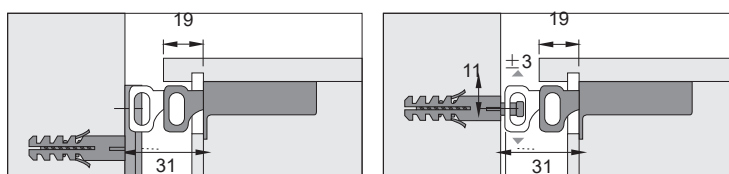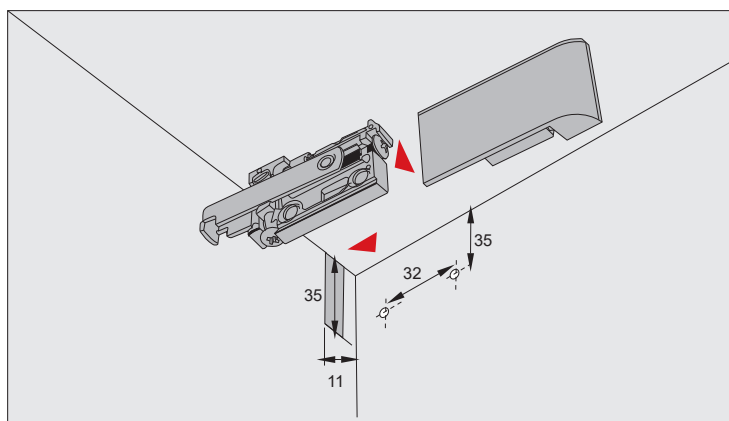




FFB02

Concealed Cabinet Hanger

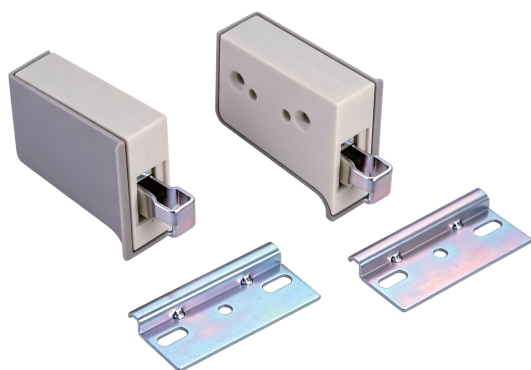

Color : White+Zinc plated/Grey+Zinc plated

Material : Steel / Plastic

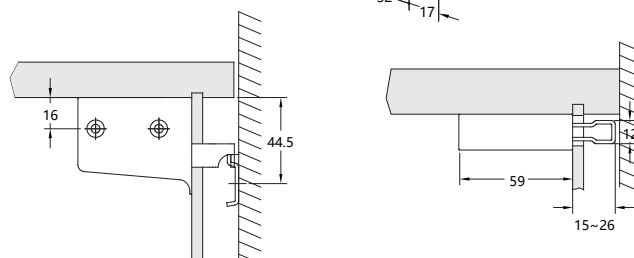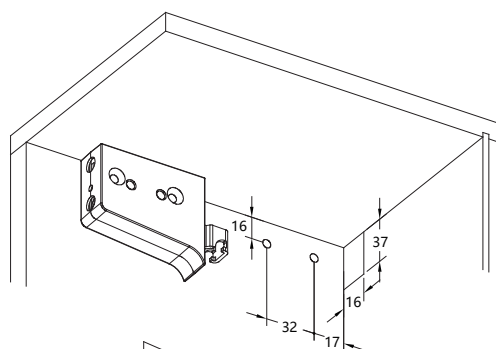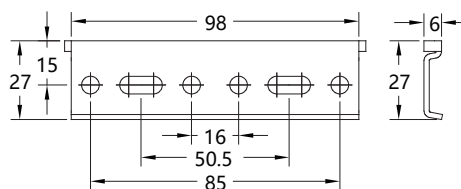




FURNITURE CONNECTOR

Reliable Solutions

For Residential & Architectural Projects

FCE01

3-in-1 Cam Lock Furniture Connector



Panel thickness : 15mm



High : 11.5mm

Material : Zinc alloy

Finsh : Zinc plated

FCS02

Shelf Support



High : 12.3mm

Material : Plastic / Zinc alloy

Finsh : Black

SUPPLY & SERVICES

FIXORA operates as a professional supply partner for distributors and contractors projects.

We Provide



Stable Supply Chain



North America Inventory



Low MOQ



Fast Logistics



OEM Manufacturing



Private Label Support



Reliable Delivery



Professional Service

WHY CHOOSE FIXORA

Your Reliable Hardware Supply



Stable Supply



Low MOQ



Fast Delivery



OEM & Private Label



Consistent Quality



Professional Support



North America Inventory



LET'S BUILD LONG-TERM SUCCESS TOGETHER.

FIXORA supports distributors, contractors,
and project partners with dependable
hardware solutions and scalable supply
systems.

✉ service@fixora-hardware.com

🌐 www.fixora-hardware.com

